


Flex arm luminaires

FLEX BASIC



SKU: 676.90-1

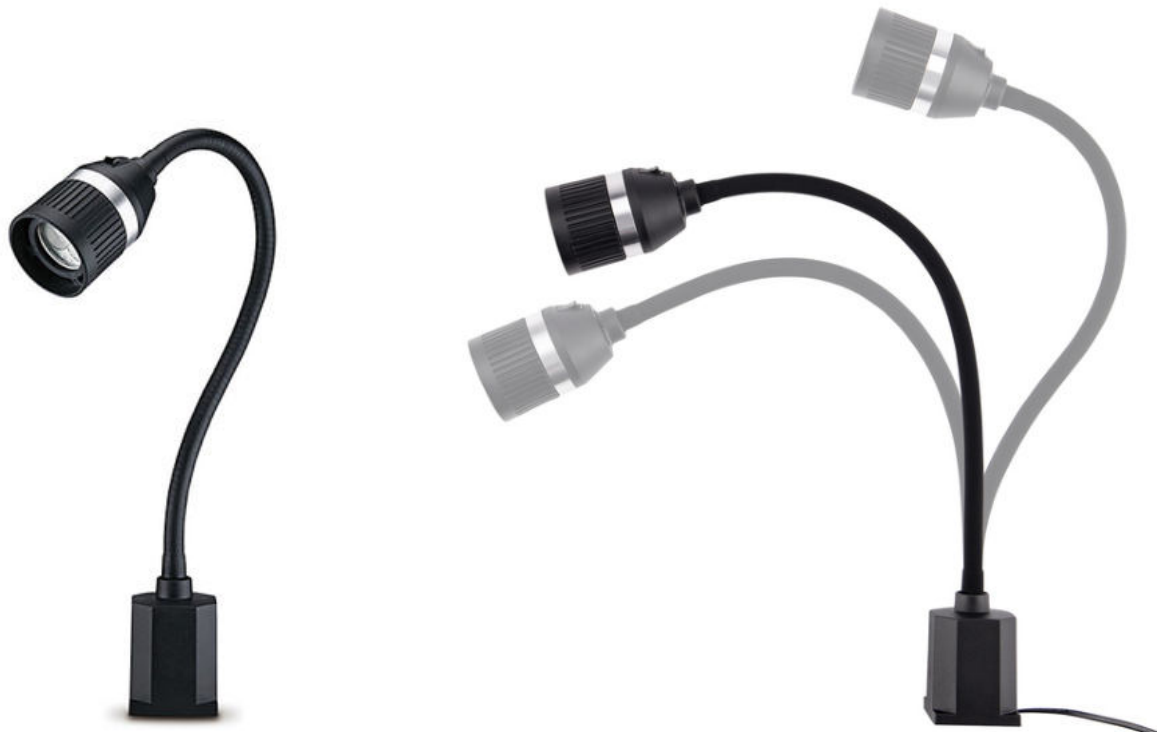


RAL 9005 / black

TECHNICAL DATA

V	100-240
Hz	50-60
W	4,5
Lm	630
Lux	14.700 (50cm)
K	5700
CRI	> 80 (typ. 83)
kg	1,1

Material flexible arm/ Luminaire head:	waterproof and oil-resistant shrink tube made of metal / luminaire head made of metal / transformer housing made of impact-resistant plastic
Dimming:	not dimmable
Articulation type:	Flexible arm (gooseneck)
Lens:	30°
Lifetime:	50.000h
Warranty:	2 years
LED Cover:	clear glass lens
Mains connection:	1.8 m PVC cable Plug-in power supply (Euro plug)
Colour:	Black
Protection class:	II
IP code:	IP 20

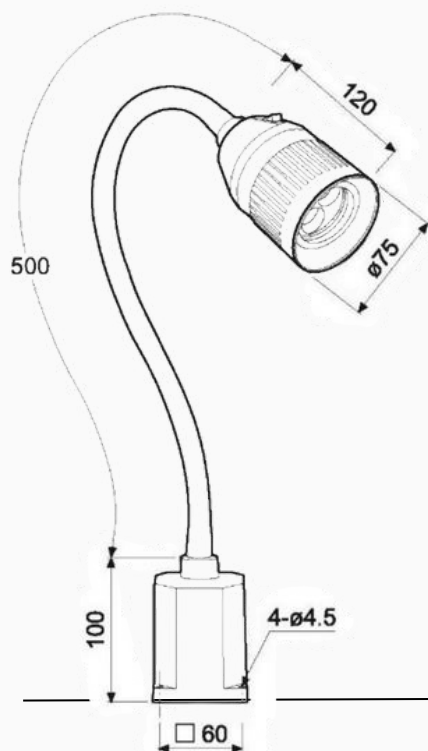

Distance: Illuminance:

50 cm	14.700 Lux
40 cm	22.300 Lux
30 cm	39.400 Lux

HIGHLIGHTS

- ✓ Fast and flexible light positioning due to robust metal spiral tube with plastic sheathing
- ✓ Robust metal flexible arm with heat-shrinkable sleeve cover / Metal luminaire head
Transformer housing made of impact-resistant plastic
- ✓ Two-part luminaire head with integrated switch and ventilation openings for optimum heat balance
- ✓ universally applicable luminaire for workplaces and machines with normal ambient conditions



ATTACHMENTS

For Flex Basic



Screw-on flange (incl.)



Table clamp 0-44 mm
SKU: 007.90



Magnetic base
SKU: 008.90



Wall angle
SKU: 006.90

Posenerstraße 5
83024 Rosenheim
Germany

Sales: +49(0)15156125273
info@rmd-leuchten.de
www.rmd-leuchten.de

