

Pendant lights

SPECIAL LINE P72

Steel cable suspension
individually shortenable



SKU: 589-72.96sd

Drawbar suspension
50 - 150cm (height adjustable)



SKU: 589-72.95sd

● RAL 9006 /silver

TECHNICAL DATA

V	220-240
Hz	50-60
W	72 / 144
Lm	8400
K	5700
Lux	8000 (50cm)
CRI	> 95 (typ. 97)
kg	5,3 / 11,3
RG	0

Material:	Extruded aluminium
Insert:	Single / double workstation
Dimming:	Push-button (ON/OFF/DIM) / 1-100%
Lifetime:	50.000h
Warranty:	2 years
LED Cover:	Microprismatic lens/plus additional high-tech diffuser foil
Power connection:	luster terminals in right canopy
LED Driver:	Tridonic
Colour:	Silver
Dimensions:	870 x 215 x 35.5 mm (LxWxH) 1950 x 215 x 35.5 mm (LxWxH)





Distance:	Illuminance:
80 cm	4800 Lux
70 cm	5500 Lux
60 cm	6500 Lux
50 cm	8000 Lux

Work surface


HIGHLIGHTS

- ✓ No colour location shifts when dimming the LEDs
- ✓ No UV and infrared components in the light spectrum (prevents e.g. premature hardening of plastics)
- ✓ No heat load in the direction of light emission - only slight heating of the luminaire surface
- ✓ Extremely bright with simultaneous large-area illumination thanks to two parallel LED chambers - up to 8000lx illuminance at a distance of 50 cm
- ✓ Optical design package: also available with filigree steel cable suspensions and transparent insulated supply cable (not infinitely height-adjustable)

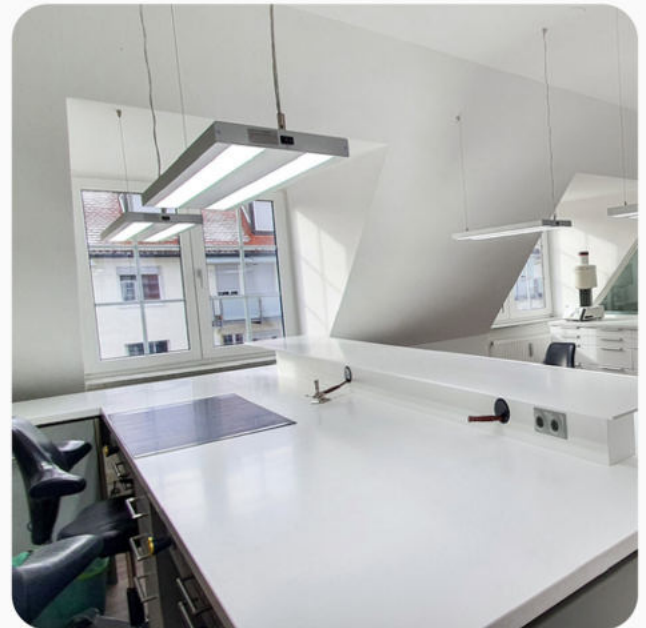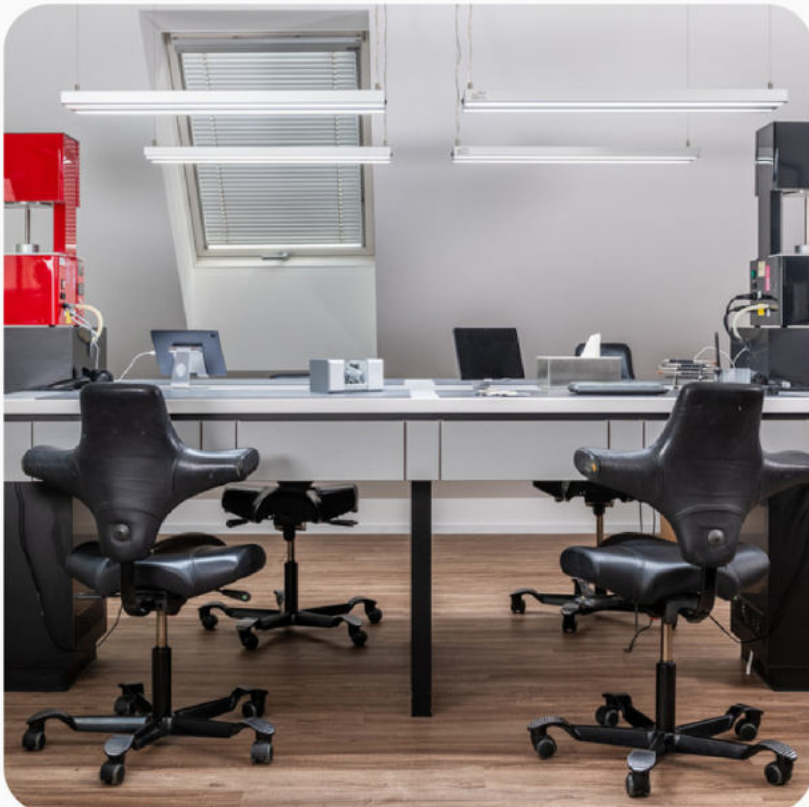

OPTIONAL

Double workplace

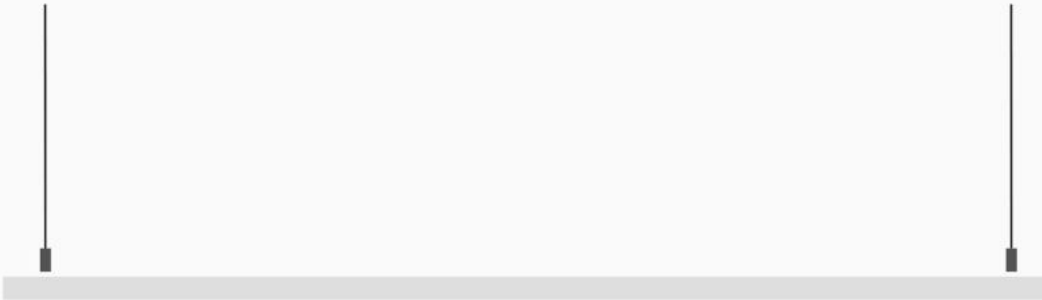

Dimension: 1950 x 215 x 35.5 mm (LxWxH)

Suspension: only steel cable suspension

SKU: 589-144.96sd

Indirect light component*



W	12
Lm	2260
K	5000
Lux	+ 300
CRI	> 80 (typ. 83)

- ✓ Depending on the colour and texture of the ceiling and the distance, switching on the indirect light component provides approx. 200 - 300 lux more light.
- ✓ Room brightening (avoidance of the cave effect, more pleasant room feeling due to ceiling brightening)

* Indirect light component on request

Posenerstraße 5
83024 Rosenheim
Germany

Sales: +49(0)15156125273
info@rmd-leuchten.de
www.rmd-leuchten.de

